
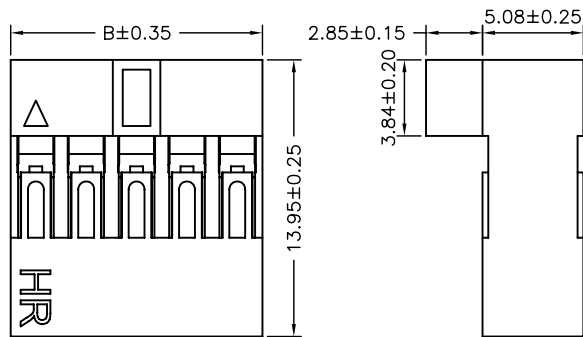



Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B		A	B
A2546H-N-2X02P	2.54	5.08	A2546H-N-2X15P	35.56	38.10	A2546H-N-2X28P	68.58	71.12
A2546H-N-2X03P	5.08	7.62	A2546H-N-2X16P	38.10	40.64	A2546H-N-2X29P	71.12	73.66
A2546H-N-2X04P	7.62	10.16	A2546H-N-2X17P	40.64	43.18	A2546H-N-2X30P	73.66	76.20
A2546H-N-2X05P	10.16	12.70	A2546H-N-2X18P	43.18	45.72	A2546H-N-2X31P	76.20	78.74
A2546H-N-2X06P	12.70	15.24	A2546H-N-2X19P	45.72	48.26	A2546H-N-2X32P	78.74	81.28
A2546H-N-2X07P	15.24	17.78	A2546H-N-2X20P	48.26	50.80	A2546H-N-2X33P	81.28	83.82
A2546H-N-2X08P	17.78	20.32	A2546H-N-2X21P	50.80	53.34	A2546H-N-2X34P	83.82	86.36
A2546H-N-2X09P	20.32	22.86	A2546H-N-2X22P	53.34	55.88	A2546H-N-2X35P	86.36	88.90
A2546H-N-2X10P	22.86	25.40	A2546H-N-2X23P	55.88	58.42	A2546H-N-2X36P	88.90	91.44
A2546H-N-2X11P	25.40	27.94	A2546H-N-2X24P	58.42	60.96	A2546H-N-2X37P	91.44	93.98
A2546H-N-2X12P	27.94	30.48	A2546H-N-2X25P	60.96	63.50	A2546H-N-2X38P	93.98	96.52
A2546H-N-2X13P	30.48	33.02	A2546H-N-2X26P	63.50	66.04	A2546H-N-2X39P	96.52	99.06
A2546H-N-2X14P	33.02	35.56	A2546H-N-2X27P	66.04	68.58	A2546H-N-2X40P	99.06	101.60

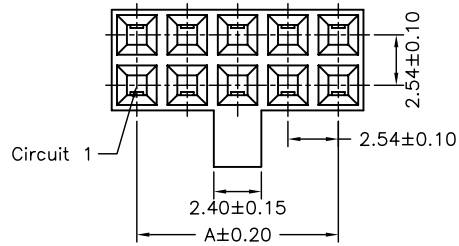

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66+GF,UL94V-0
 Color: Black

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT	SCALE	SHEET	TITLE:
		mm		1 of 1	2.54mm PITCH DUAL ROW HOUSING WITH NOSE
		DRAWN BY	APPROVED BY		
		董正一	董正一		
		2001.02.01	2001.02.01		
		GENERAL TOLERANCE			
B2	REVISE	2006.08.14	X. X±0.25	ANGLE±	DRAW NO. : A2546H-N-2XNP
B1	REVISE	2006.04.20	X. XX±0.15		
B0	NEW RELEASE	2006.02.20	X. XXX±0.05		
REV.	DESCRIPTION	DATE			
				REV. B2	