





Circuit 1

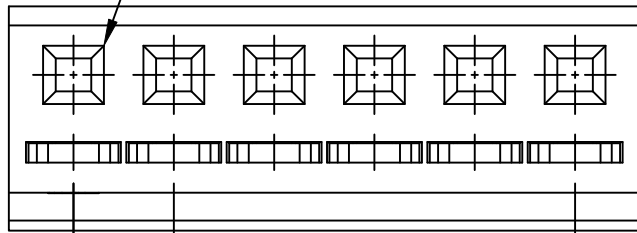


3.96 ± 0.10

$A \pm 0.20$

$B \pm 0.25$

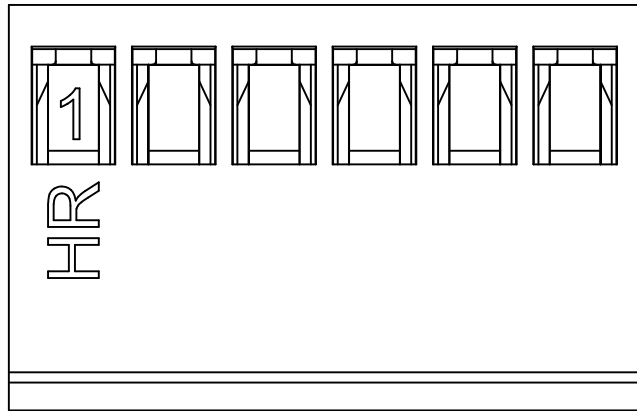

16.00 ± 0.25

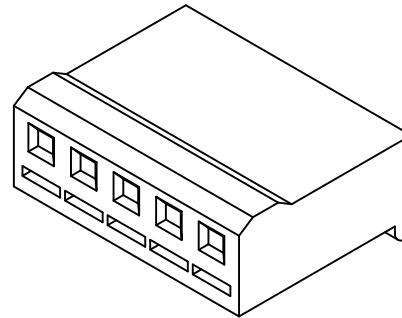

7.35 ± 0.25

1.50 ± 0.20

8.10 ± 0.25

P/N LEGEND

A3962 H-XP N 2 N NP N 00 G									
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩
① Series No.	② Connector type: H=Housing	③ No. of circuits	④ N=Halogen Free	⑤ Material: 2=Nylon 66-V2,	⑥ Color: N=Natural(Translucent),	⑦ Plating code: NP=Non-plating	⑧ Plating code: N=Non-plating	⑨ Option code: 00=Standard	⑩ Packing code: G=Bag

SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Color: Natural(Translucent) Or White

Circuit No.	Dimensions	
	A	B
02P	3.96	9.06
03P	7.92	13.02
04P	11.88	16.98
05P	15.84	20.94
06P	19.80	24.90
07P	23.76	28.86
08P	27.72	32.82
09P	31.68	36.78
10P	35.64	40.74
11P	39.60	44.70
12P	43.56	48.66

				燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.	
UNIT		SCALE	SHEET		TITLE:
mm		1 : 1	1 of 1		3.96mm PITCH HOUSING
DRAWN BY		APPROVED BY		DRAW NO. : A3962H-XPNXXXXXXXXX	
劉包根		董正一			
2011.10.18		2011.10.18		REV. A2	
GENERAL TOLERANCE		ANGLE±			
A2	EN1708140005	2017.08.14	劉建芳	X.X±0.25	
A1	EN1208070255	2012.08.07	周傑亮	X.XX±0.15	
A0	NEW RELEASE	2011.10.18	劉包根	X.XXX±0.05	
REV.	DESCRIPTION	DATE	NAME		