



SPECIFICATIONS


Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66,UL94V-0
 Color: White

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
B2512HV-02P-N	2.50	6.50
B2512HV-03P-N	5.00	9.00
B2512HV-04P-N	7.50	11.50
B2512HV-05P-N	10.00	14.00
B2512HV-06P-N	12.50	16.50
B2512HV-07P-N	15.00	19.00
B2512HV-08P-N	17.50	21.50
B2512HV-09P-N	20.00	24.00
B2512HV-10P-N	22.50	26.50
B2512HV-11P-N	25.00	29.00
B2512HV-12P-N	27.50	31.50
B2512HV-13P-N	30.00	34.00
B2512HV-14P-N	32.50	36.50
B2512HV-15P-N	35.00	39.00
B2512HV-16P-N	37.50	41.50

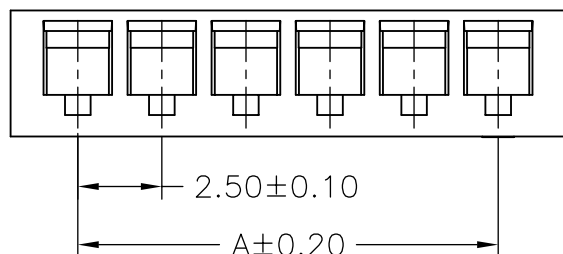

P.C.B LAYOUT

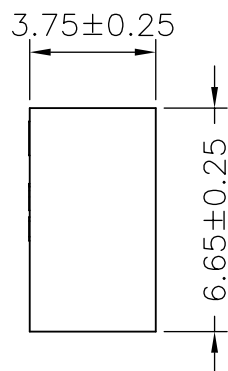

Circuit 1

					JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.		
			UNIT	SCALE	SHEET	TITLE:	
			mm		1 of 1	2.50mm PITCH 180° HOUSING	
			DRAWN BY	APPROVED BY			
			歐陽小強	謝瑞清			
			2008.10.07	2008.10.07			
			GENERAL TOLERANCE				
			X. X±0.25	ANGLE±		DRAW NO. : B2512HV-XP-N	
			X. XX±0.15				
			X. XXX±0.05				
A0	NEW RELEASE	2008.10.07					REV. A0
REV.	DESCRIPTION	DATE					