











04~21 Contacts

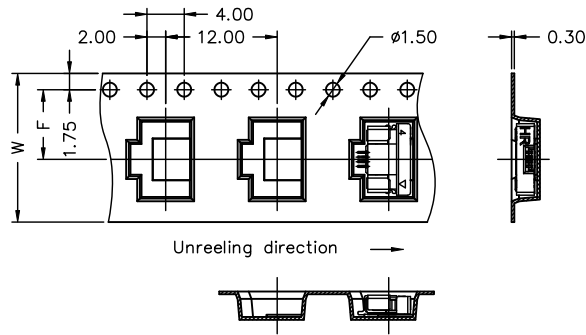

22~50 Contacts

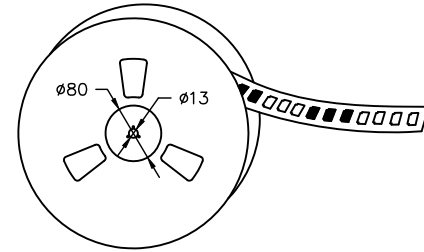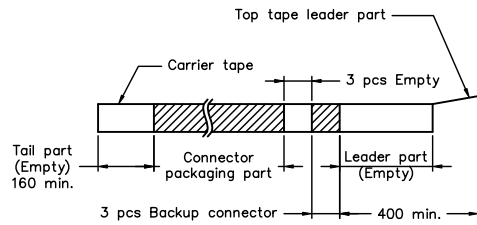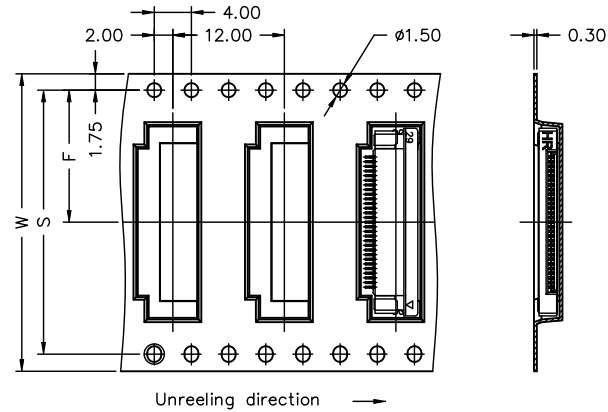

NOTE:  
Material: Transparent  
Anti-static Polystyrene.

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel	Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
04P	16	7.50		2,000	24P	32	14.20	28.40	2,000
05P	16	7.50		2,000	25P	32	14.20	28.40	2,000
06P	24	11.50		2,000	26P	32	14.20	28.40	2,000
07P	24	11.50		2,000	27P	32	14.20	28.40	2,000
08P	24	11.50		2,000	28P	32	14.20	28.40	2,000
09P	24	11.50		2,000	29P	32	14.20	28.40	2,000
10P	24	11.50		2,000	30P	32	14.20	28.40	2,000
11P	24	11.50		2,000	31P	44	20.20	40.40	2,000
12P	24	11.50		2,000	32P	44	20.20	40.40	2,000
13P	24	11.50		2,000	33P	44	20.20	40.40	2,000
14P	24	11.50		2,000	34P	44	20.20	40.40	2,000
15P	24	11.50		2,000	35P	44	20.20	40.40	2,000
16P	24	11.50		2,000	36P	44	20.20	40.40	2,000
17P	24	11.50		2,000	37P	44	20.20	40.40	2,000
18P	24	11.50		2,000	38P	44	20.20	40.40	2,000
19P	24	11.50		2,000	39P	44	20.20	40.40	2,000
20P	24	11.50		2,000	40P	44	20.20	40.40	2,000
21P	24	11.50		2,000	41P	44	20.20	40.40	2,000
22P	32	14.20	28.40	2,000	45P	44	20.20	40.40	2,000
23P	32	14.20	28.40	2,000	50P	44	20.20	40.40	2,000

				UNIT	SCALE	SHEET
				mm	1 : 1	2 of 2
				DRAWN BY		APPROVED BY
				權生新		董正一
				2012.08.17		2012.08.17
				GENERAL TOLERANCE		
A1	ER1908010003	2019.07.17	徐富永	X.X±0.25	ANGLE±	
A0	NEW RELEASE	2012.08.17	權生新	X.XX±0.15	DRAW NO. :	
REV.	DESCRIPTION	DATE	NAME	X.XXX±0.05	F0514WR-S-XPXXXXXXBOX	

TITLE:  
0.50mm PITCH FFC/FPC  
CONNECTOR, 90° SMT TYPE,  
ZIF, BOTTOM CONTACT STYLE,  
TAPING SPEC.

REV. A1