

P/N LEGEND





A12514	WV	S	XP	N	L	N	T1	T	00	L
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪

① Series No.
 ② Connector type: WV=Vertical
 ③ Mounting type: S=SMT TYPE
 ④ No. of circuits
 ⑤ N=Halogen Free
 ⑥ Material: L=LCP ;
 ⑦ Color: N=Natural ;
 ⑧ Plating code for contacts:
 T1=Matte Tin-plated;
 ⑨ Plating code for solder tabs:
 T=Matte Tin-plated;
 ⑩ Option code: 00=Standard
 ⑪ Packing code: L=Tape & Reel(With Mylar)

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze
 Solder Tabs: Brass


Circuit No.	Dimensions		
	A	B	C
02P	1.25	5.75	3.80
03P	2.50	7.00	5.05
04P	3.75	8.25	6.30
05P	5.00	9.50	7.55
06P	6.25	10.75	8.80
07P	7.50	12.00	10.05
08P	8.75	13.25	11.30
09P	10.00	14.50	12.55
10P	11.25	15.75	13.80
11P	12.50	17.00	15.05
12P	13.75	18.25	16.30
13P	15.00	19.50	17.55
14P	16.25	20.75	18.80
15P	17.50	22.00	20.05

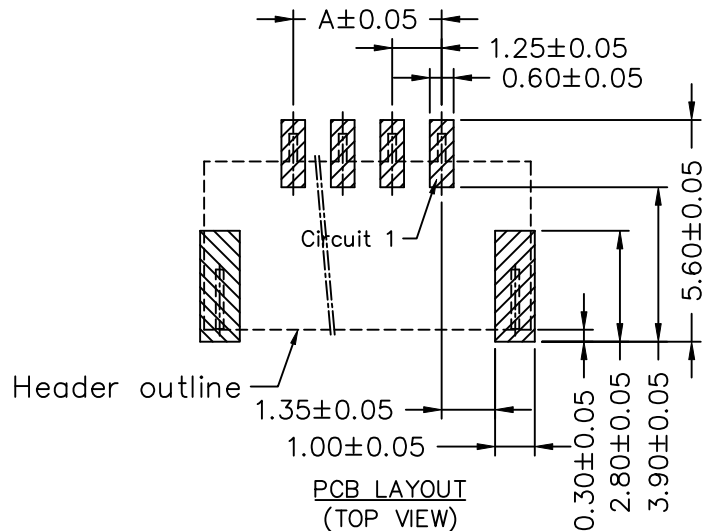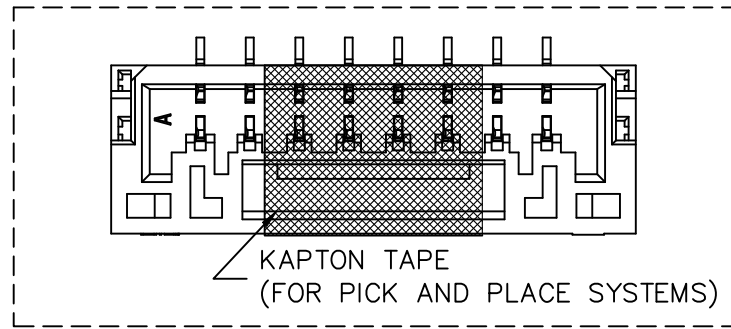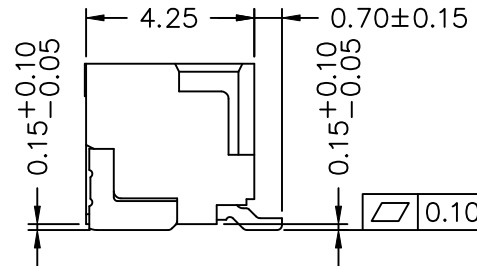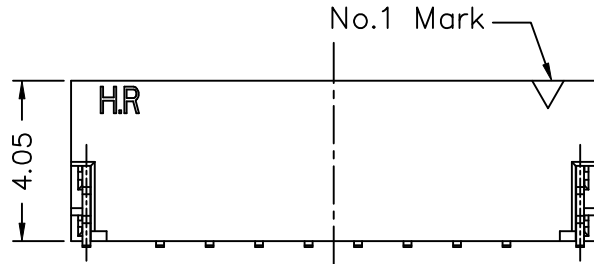


燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.			
UNIT	SCALE	SHEET	TITLE:
mm	1 : 1	1 of 3	
DRAWN BY	APPROVED BY		1.25mm PITCH 180° WAFER-SMT TYPE
徐富永	徐富永		
2020.06.17	2020.06.17		
GENERAL TOLERANCE			
X. X±0.25	ANGLE±		
X. XX±0.15			
X. XXX±0.05			
A0	NEW RELEASE	2020.06.17	鄭小嬌
REV.	DESCRIPTION	DATE	NAME
DRAW NO. :			REV. A0
A12514WV-S-XPXXXXXXXL			




塑膠各PIN外觀差異




02P




03P

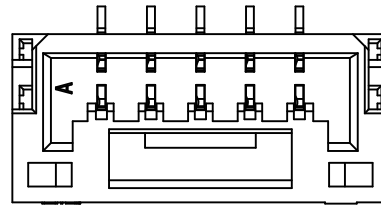


04~05P

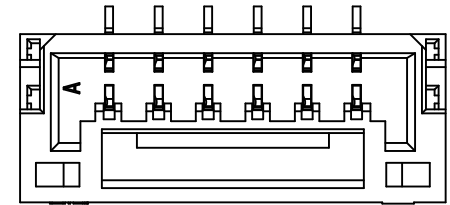

06P





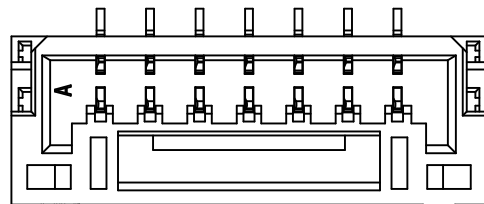


07P

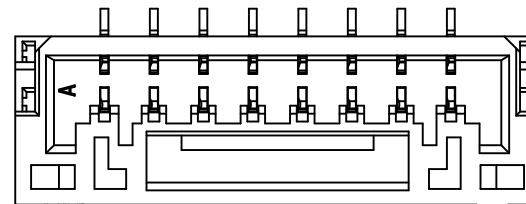

08P

				燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.			
UNIT		SCALE	SHEET		TITLE:		
mm		1 : 1	2 of 3		1.25mm PITCH 180° WAFER-SMT TYPE		
DRAWN BY		APPROVED BY		DRAW NO. : A12514WV-S-XPNXXXXXXXXL			
徐富永		徐富永					
2020.06.17		2020.06.17		REV. A0			
GENERAL TOLERANCE				ANGLE±			
X. X±0.25		X. XX±0.15					
X. XXX±0.05							
A0	NEW RELEASE	2020.06.17	鄭小嬌				
REV.	DESCRIPTION	DATE	NAME				

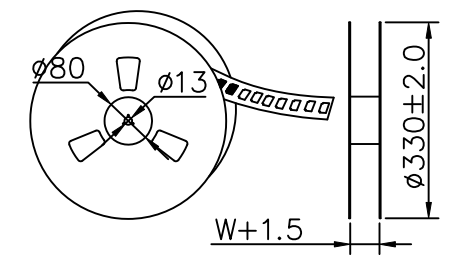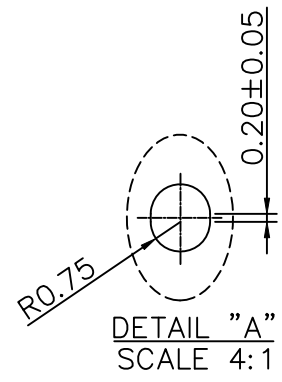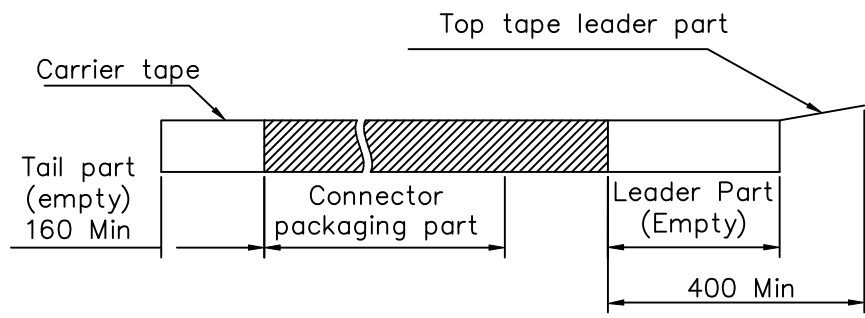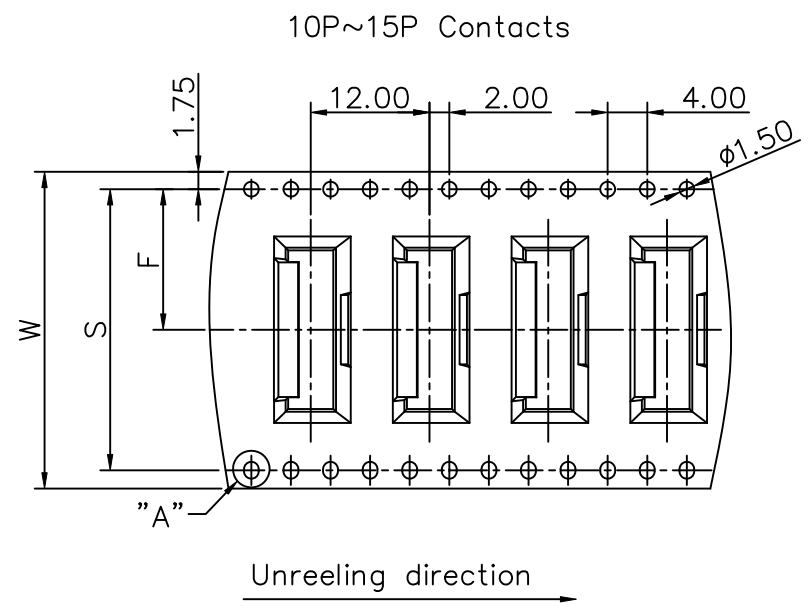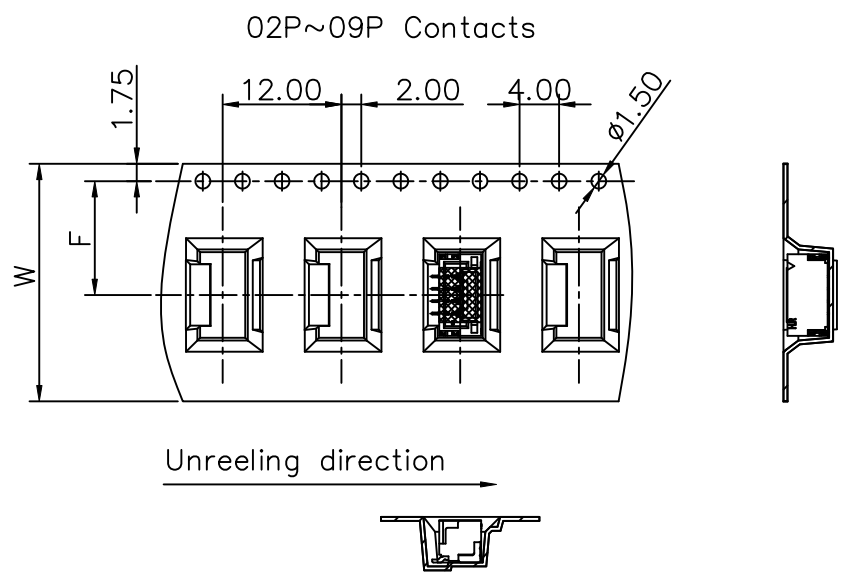

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
02P	16.00	7.50	/	1,000
03P				
04P				
05P				
06P				
07P	24.00	11.50	/	1,000
08P				
09P				
10P	32.00	14.20	28.40	1,000
11P				
12P	44.00	20.20	40.40	1,000
13P				
14P				
15P				

				燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.	
		UNIT	SCALE	SHEET	TITLE:
		mm	1 : 1	3 of 3	1.25mm PITCH 180° WAFER-SMT TYPE TAPING SPEC.
		DRAWN BY	APPROVED BY		
		徐富永	徐富永		
		2020.06.17	2020.06.17		
GENERAL TOLERANCE					
		X. X±0.25	ANGLE±		DRAW NO. : A12514WV-S-XPNXXXXXXXXL
		X. XX±0.15			
		X. XXX±0.05			
A0	NEW RELEASE	2020.06.17	鄭小嬌		
REV.	DESCRIPTION	DATE	NAME		