



P/N LEGEND






A2006	H-XP	N	0	X	NP	N	00	G	
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩

① Series No.  
 ② Connector type: H=Housing  
 ③ No. of circuits  
 ④ N=Halogen Free  
 ⑤ Material: 0=Nylon 66-V0  
 ⑥ Color: W=White B=Black  
 ⑦ Plating code: NP=Non-plating  
 ⑧ Plating code: N=Non-plating  
 ⑨ Option code: 00=Standard,Without yellow point  
 ⑩ Packing code: G=Bag

SPECIFICATIONS

Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 30mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1000V AC/minute  
 Material: Nylon 66,UL94V-0  
 Color: White

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	2.00	4.60	10P	18.00	20.60
03P	4.00	6.60	11P	20.00	22.60
04P	6.00	8.60	12P	22.00	24.60
05P	8.00	10.60	13P	24.00	26.60
06P	10.00	12.60	14P	26.00	28.60
07P	12.00	14.60	15P	28.00	30.60
08P	14.00	16.60	16P	30.00	32.60
09P	16.00	18.60			

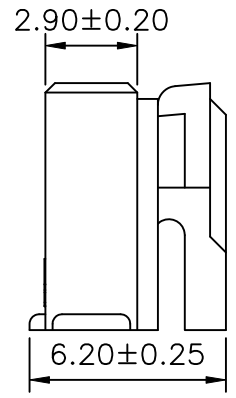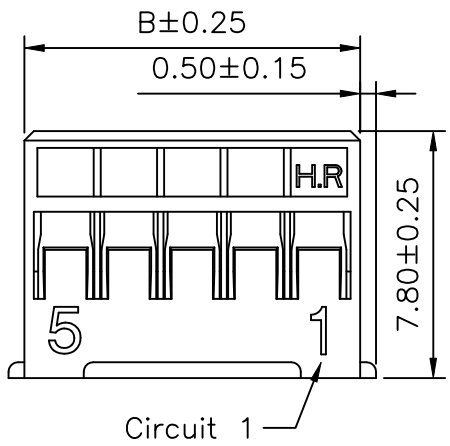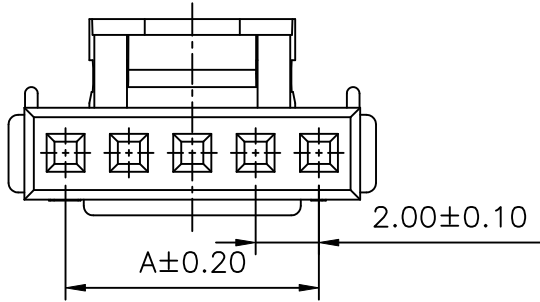

				燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.			
UNIT		SCALE	SHEET		TITLE:		
mm		1 : 1	1 of 1		<b>2.00mm PITCH HOUSING</b>		
DRAWN BY		APPROVED BY		DRAW NO. : A2006H-XPXXXXXXXXX REV. A3			
周傑亮		董正一					
2012. 1. 10		2012. 1. 10					
GENERAL TOLERANCE				ANGLE±			
A3	EN20200116175	2020. 01. 16	劉建芳	X. X±0. 25			
A2	EN1401080002	2014. 01. 02	郭木恩	X. XX±0. 15			
A1	EN1308090274	2013. 08. 12	郭木恩	X. XXX±0. 05			
A0	NEW RELEASE	2012. 1. 10	周傑亮				
REV.	DESCRIPTION	DATE	NAME				